

A division of Troy Sheet Metal Works, Inc. 1024 South Vail Avenue, Montebello, CA 90640 www.troyproducts.com 323 720-4100

Part No: AC-EB-SL-TRAY-2

Description: SLIDING EQUIPMENT TRAY (FULTERER SLIDES)

Tools Required:

■ 5/32 allen wrench ■ 7/32 allen wrench ■ 7/16 socket/wrench ■ 9/16 socket/wrench

Troy Products recommends reading through installation instructions prior to installation and to check all necessary parts have been included (check against bill of materials table).

IMPORTANT NOTES

• This sliding equipment tray is designed to be installed on CP-21TH-MNT-EB (Tahoe 21) or CP-UV20-MNT-EB (PIUV 20) elevated cargo mounts (sold separately).


Electronics fence AC-EB-TRAY-FENCE can be added to front of sliding tray (sold separately).

1.) Cargo mounts offer four positions that will provide different internal heights where the sliding tray can be installed, determine the best position based on your electronic device's dimensions to be installed.

0) (0
DIM.			
	o 4 🥤	0	
	o 3 Positions	0	
	o 2 Positions	0	0.1
	o 1 J	0	


POSITION	DIM. CP-21TH-MNT-EB (Tahoe 21)	DIM. CP-UV20-MNT-EB (PIUV 20)
1	6.5"	6"
2	5.5"	5"
3	4.5"	4"
4	3.5"	3"

2.) Extend drawer slides by pressing down the red release tabs, pull slide out and align holes of slide with mounting holes. Install the slides with provided (2) 1/4-20 X 5/8" Button Head Socket Screws and (2) 1/4-20 hex nylon nuts per side, bolt heads to face inside with hex nuts on the outside face as shown.

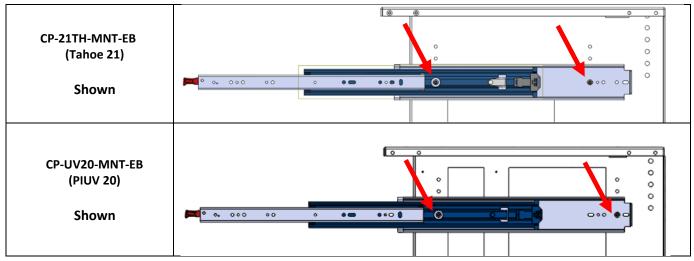


AC-EB-SL-TRAY-2


3.) Install spring tensioner assemblies as shown, tensioner assembly location will depend on position of where the slides were installed **(CP-21TH-MNT-EB SHOWN driver side shown)** use the provided (2) 3/8-16 X 3/4" bolts and (2) 3/8-16 nylon hex nuts per side.

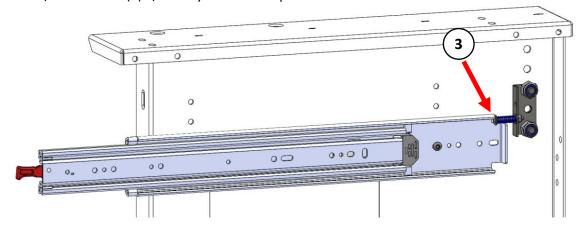


4.) Install tray to the slides as shown, red release tabs to be relatively flush with tray, utilize the (3) 1/4-20 X 1 /2" BH Socket Screw and (3) 1 /4-20 keps hex nuts per side. Bolts will be run from the outside with the hex nuts on the inside of the tray. Tighten all bolts. (CP-21TH-MNT-EB SHOWN)

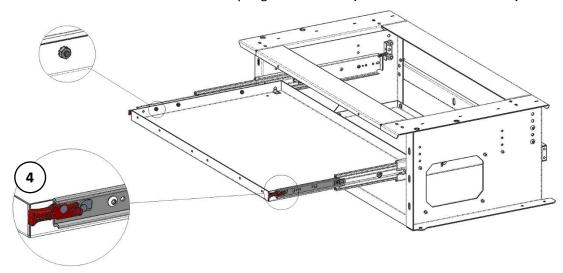

5.) (If equipped) Install AC-EB-TRAY-FENCE fence onto tray and then the handle with the provided 1 /4-20 X 1/2" button Head Socket Screws and 1 /4-20 Keps Nuts. (CP-21TH-MNT-EB SHOWN)

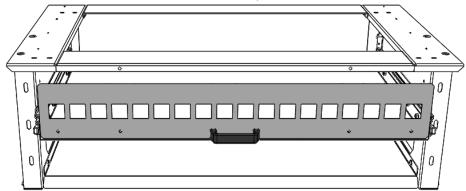

Your installation is now complete. If you have any questions or suggestions for adding additional instructions, please call **Customer Service at (800) 700-8769.**

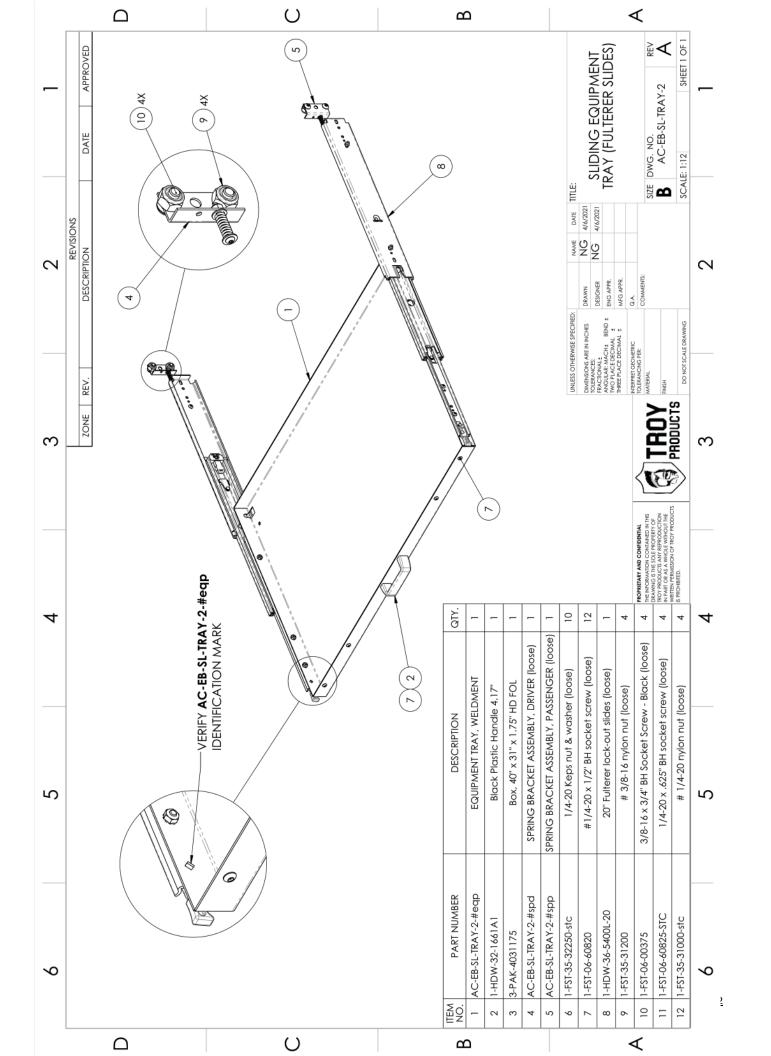

AC-EB-SL-TRAY-2 - Bill of materials

PARTS				
Part #	Description	QTY.	Picture	
AC-EB-SL-TRAY-2#eqp	EQUIPMENT TRAY, WELDMENT	1		
1-HDW-32-1661A1	BLACK PLASTIC HANDLE 4.17"	1		
AC-EB-SL-TRAY-2-#spd	SPRING BRACKET ASSEMBLY, DRIVER	1		
AC-EB-SL-TRAY-2-#spp	SPRING BRACKET ASSEMBLY, PASSENGER	1		
1-HDW-36-5400L-20	20" FULTERER LOCK-OUT SLIDES	1		

HARDWARE					
Part #	Description	QTY.	Picture		
1-FST-35-32250	1/4-20 KEPS NUT & WASHER	10			
1-FST-06-60820	#1/4-20 x 1/2" BH SOCKET SCREW	12			
1-FST-35-31200	# 3/8-16 NYLON HEX NUT	4			
1-FST-06-00375	3/8-16 x 3/4" BH Socket Screw - Black	4			
1-FST-06-60825	1/4-20 X .625" BH SOCKET SCREW	4			
1-FST-35-31000	# 1/4-20 NYLON HEX NUT	4			